

CR-IS/Series Ø67 LED / Horn Combination




Technical data - Electrical ratings

Voltage supply	12VDC to 24VDC 24VAC, 110VAC, 220VAC
Signal type	Continuous (S) Strobe (Ç) Flashing (F) Rotation (D)
Consumption w/o load with buzzer	1-2W
Buzzer output	90dB 110dB optional
Dimensions	69 x 73 x 222mm
Weight approx	300g
Housing material	polycarbonate
Base material	abs
Connection	Cable
Buzzer tone type	Continuous or flashing
Protection	IP54 / IP65

Code key

CR-ISCB-CH-220-R			
SIGNAL TYPE	LIGHT SOURCE	SUPPLY VOLTAGE	LENS COLOR
C : Continuous / Sabit F : Flashing / Flaşör S : Strobe / Çakar R : Rotating / Döner CB: Continuous+Buzzer / Sabit + Buzzer FB: Flashing+Buzzer / Flaşör + Buzzer SB: Strobe+Buzzer / Çakar + Buzzer RB: Rotating+Buzzer / Döner + Buzzer	P: POWER LED	12 : 12VDC 24 : 24VDC / VAC 48 : 48VDC 110: 110VAC 220: 220VAC Standard comes with 90dB buzzer	R : Red / Kırmızı Y : Yellow / Sarı G : Green / Yeşil B : Blue / Mavi W: White / Beyaz
B : BUZZER		MOUNTING TYPE	MOUNTING TYPE
		H : 110dB Buzzer	A : LED B : B Type Horn C : LED + B Type Horn

Technical Drawings

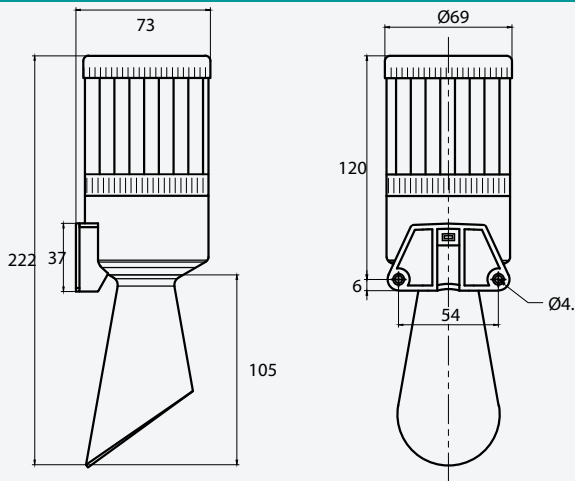

CR-IS/Series Electrical Connections

